


Inline wall mount sampler

acc. ISO 5667 / EN 16479 / NEN 6600-1

SAMPTec.nl

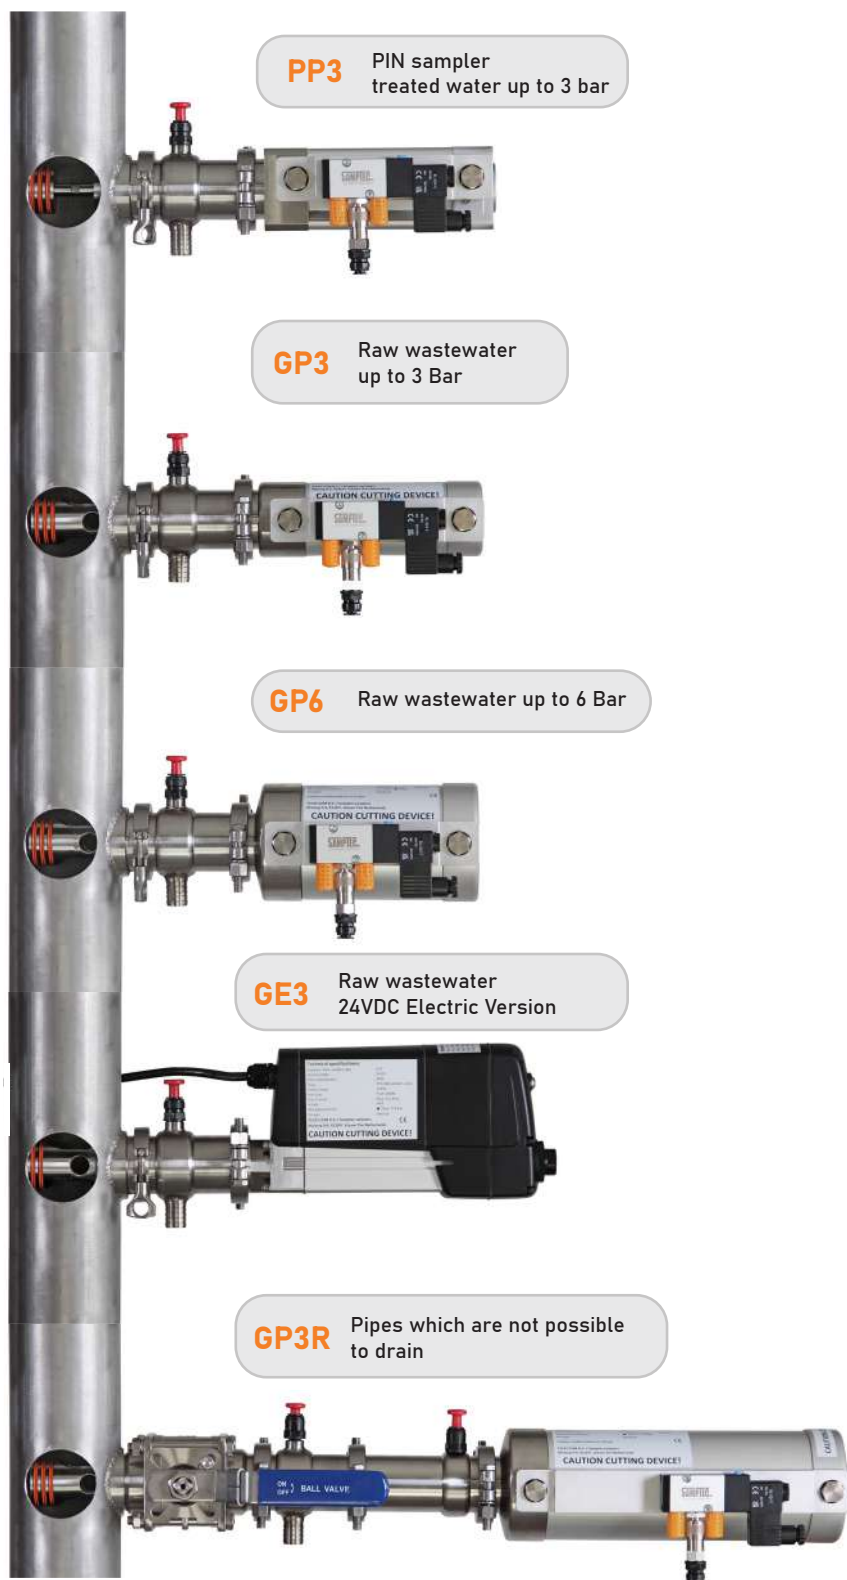

PP3 PIN sampler
treated water up to 3 bar


GP3 Raw wastewater
up to 3 Bar

GP6 Raw wastewater up to 6 Bar

GE3 Raw wastewater
24VDC Electric Version


GP3R Pipes which are not possible
to drain

PIN version



Treated water

Guillotine version



Raw water



Enclosure material	ABS
Colour	RAL 5021 Water blue
Power supply	110/230 VAC 50/60Hz - 6 Amp
Sampling type	Inline / pressurized pipes
Actuator	*pneumatic or electric
Max sample pipe pressure	3 bar, optional 6 bar
Internal hardware	ULV
Sampling assembly	Externally mounted on sample pipe
Process connection	2" Tri-Clamp
Process mount	SS316 welding or 2" SS316 screw ridge
Sample volume	fixed 50 CC other volumes on request
Position contact	optional depending on actuator type
Size	200 x 300 x 350 mm
Weight	±5 Kg pneumatic / ±7 Kg electric

Select your sampling assembly:

Pneumatic	PP3 / GP3 / GP6 / GP3R
Electric	GE3 / GE6
Acc.	ISO 5667-2 & 10 / NEN 6600-1

*Pneumatic versions require air supply 6-8 bar conditioned.



MADE IN HOLLAND



Samptec® is a TEC42 product
TEC42.COM B.V.
Mijlweg 9-4, 4131PJ Vianen, The Netherlands

info@TEC42.com
+31 85 0600642